BS ISO/IEC 11801-1:2017



BSI Standards Publication

Information technology – Generic cabling for customer premises –

Part 1: General requirements

bsi.

National foreword

This British Standard is the UK implementation of ISO/IEC 11801-1:2017.

The UK participation in its preparation was entrusted to Technical Committee TCT/7, Telecommunications - Installation requirements.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2018
Published by BSI Standards Limited 2018

ISBN 978 0 580 90687 9

ICS 35.200

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2018.

Amendments/corrigenda issued since publication

Date	Text affected



ISO/IEC 11801-1

Edition 1.0 2017-11

INTERNATIONAL STANDARD

Information technology – Generic cabling for customer premises – Part 1: General requirements

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-5050-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD 11
INTRODUCTION 13
1 Scope 15
2 Normative references 15
3 Terms, definitions, abbreviations and symbols 20
3.1 Terms and definitions 20
3.2 Abbreviations 27
3.3 Symbols 29
3.3.1 Variables 29
3.3.2 Indices 30
4 Conformance 30
5 Structure of generic cabling 31
5.1 Functional elements 31
5.2 Interfaces 32
5.3 Cabling subsystems 32
5.3.1 Cabling subsystem 1 32
5.3.2 Cabling subsystems $n \geq 2$ 33
5.3.3 Common subsystems 33
5.3.4 Tie cabling 34
5.3.5 Channel and permanent link 34
6 Channel performance requirements 34
6.1 General 34
6.2 Environmental performance 34
6.2.1 General 34
6.2.2 Environmental classification 35
6.3 Balanced cabling transmission performance 37
6.3.1 General 37
6.3.2 Component choice 38
6.3.3 Channel parameters 38
6.4 Coaxial cabling transmission performance 64
6.4.1 General 64
6.4.2 Component choice 65
6.4.3 Channel parameters 65
6.5 Optical fibre cabling transmission performance 67
6.5.1 Component choice 67
6.5.2 Channel parameters 67
7 Link performance requirements 67
7.1 General 67
7.2 Balanced cabling 68
7.2.1 General 68
7.2.2 Return loss 69
7.2.3 Insertion loss/attenuation 70
7.2.4 NEXT 72
7.2.5 Attenuation to crosstalk ratio at the near-end 76
7.2.6 Attenuation to crosstalk ratio at the far-end 78
7.2.7 Direct current loop resistance 82

7.2.8 Direct current resistance unbalance 83
7.2.9 Propagation delay 83
7.2.10 Delay skew 84
7.2.11 Unbalance attenuation and coupling attenuation 86
7.2.12 Alien crosstalk 89
7.3 Coaxial cabling 94
7.3.1 General 94
7.3.2 Return loss 94
7.3.3 Insertion loss 94
7.3.4 Direct current loop resistance 95
7.3.5 DC current carrying capacity 95
7.3.6 Screening attenuation 95
7.4 Optical fibre cabling 95
8 Reference implementation for backbone cabling subsystems 96
8.1 General 96
8.2 Balanced cabling 96
8.2.1 Component choice 96
8.2.2 Dimensions 96
8.3 Optical fibre cabling 97
8.3.1 General 97
8.3.2 Component selection 98
8.3.3 Dimensions 98
9 Cable requirements 98
9.1 General 98
9.2 Operating environment 98
9.3 Balanced cables 98
9.3.1 Basic requirements 98
9.3.2 Balanced cables of Category 5 through 7_A, 8.1 and 8.2 99
9.3.3 Balanced cables of Category BCT-B 101
9.4 Coaxial cables 103
9.4.1 General 103
9.4.2 Environmental characteristics 103
9.4.3 Mechanical characteristics 103
9.4.4 Electrical characteristics 104
9.5 Optical fibre cable (cabled optical fibres) 104
9.5.1 Mechanical and environmental characteristics 104
9.5.2 Cabled optical fibre Categories 105
10 Connecting hardware requirements 106
10.1 General requirements 106
10.1.1 Overview 106
10.1.2 Location 106
10.1.3 Design 106
10.1.4 Operating environment 107
10.1.5 Mounting 109
10.1.6 Installation practices 109
10.1.7 Marking and colour coding 110
10.2 Category 5 through 7_A, 8.1, and 8.2 connecting hardware for balanced cabling 110

10.2.1 General 110
10.2.2 Performance marking 110
10.2.3 Mechanical characteristics 110
10.2.4 Electrical characteristics 112
10.2.5 Additional requirements 124
10.3 BCT-B connecting hardware 125
10.4 Connecting hardware for use with coaxial cabling for BCT applications 125
10.4.1 General requirements 125
10.4.2 Performance marking 125
10.4.3 Electrical characteristics 125
10.5 Optical fibre connecting hardware 126
10.5.1 General requirements 126
10.5.2 Marking and colour coding 127
10.5.3 Mechanical and optical characteristics 127
10.6 Connecting hardware in accordance with IEC 60603-7 series 128
10.7 Connecting hardware in accordance with IEC 61076-3-104 129
10.8 Connecting hardware in accordance with IEC 61076-2-101 (Type D, 4 poles) 129
10.9 Connecting hardware in accordance with IEC 61076-2-109 (Type X, 8 poles) 129
10.10 Connecting hardware in accordance with IEC 61169-2 and IEC 61169-24 (Type F) 130
10.11 Connecting hardware for two optical fibres 130
10.12 Connecting hardware for twelve and twenty-four optical fibres 130
11 Cord requirements 131
11.1 General 131
11.2 Operating environment 131
11.3 Balanced cords of Category 5 through 7_A, 8.1, 8.2 and BCT-B 131
11.3.1 General 131
11.3.2 Identification 131
11.3.3 Operating environment 132
11.3.4 Return loss 132
11.3.5 NEXT 132
11.4 Coaxial cords 135
11.5 Optical fibre cords 135
11.5.1 General 135
11.5.2 Identification 136
11.5.3 Performance requirements for patch cords 136
Annex A (normative) Conformance testing procedures for balanced cabling of Classes A to F_A, I and II and optical fibre cabling 137
A.1 General 137
A.2 Channel and link performance testing 137
A.2.1 General 137
A.2.2 Conformance testing of balanced cabling channels, and links 137
A.2.3 Installation conformance testing of optical fibre cabling channels 138
A.3 Overview of test schedules 138
Annex B (normative) Mechanical and environmental performance testing of connecting hardware for balanced cabling 141
B.1 Overview 141
B.2 Solderless connections 141
B.3 Free and fixed connectors (modular plugs and jacks) 142

B.4 Other connecting hardware 143
Annex C (informative) Electromagnetic characteristics 145
Annex D (informative) Acronyms for balanced cables 146
Annex E (informative) Supported applications 148
E.1 Supported applications for balanced cabling 148
E.2 Supported applications for optical fibre cabling 151
E.3 Supported applications for coaxial cabling 154
E.4 Supported industrial applications for optical fibre cabling 155
Annex F (informative) Optical fibre cable OM1, OM2 and OS1 156
Bibliography 157

Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25 14
Figure 2 – General functional elements 31
Figure 3 – Interconnect models 31
Figure 4 – Cross-connect models 32
Figure 5 – Equipment and test interfaces 32
Figure 6 – Link options 68
Figure 7 – Link designations 68
Figure 8 – Backbone cabling model 96
Figure 9 – Pin grouping and pair assignments for IEC 60603-7 series interface for Categories 5, 6, 6_A and 8.1 (front view of fixed connector (jack), not to scale) 128
Figure 10 – Pin grouping and pair assignment for the IEC 60603-7 series interface for Categories 7, 7_A, 8.2 and BCT-B (front view of fixed connector (jack), not to scale) 129
Figure 11 – Pin grouping and pair assignments for the IEC 61076-3-104 interface for Categories 7, 7_A, 8.2 and BCT-B (front view of fixed connector (jack), not to scale) 129
Figure 12 – Four position jack pin and pair grouping assignments for IEC 61076-2-101 connecting hardware (front view of connector) 129
Figure 13 – Eight position jack pin and pair grouping assignments for IEC 61076-2-109 connecting hardware (front view of connector) 130
Figure 14 – Conductor assignment of IEC 61169-2 and IEC 61169-24 (Type F) connector 130
Figure 15 – Optical fibre assignments for connecting hardware for two optical fibres 130
Figure 16 – Optical fibre assignments for connecting hardware for 12 and 24 optical fibres (front view of fixed or free connector) 131
Figure D.1 – Cable naming schema 146
Figure D.2 – Cable types 147

Table 1 – Channel environments 35
Table 2 – Details of environmental classification 36
Table 3 – Return loss for a channel 39
Table 4 – Informative return loss values for a channel at key frequencies 40
Table 5 – Insertion loss for a channel 41
Table 6 – Informative insertion loss values for a channel at key frequencies 42
Table 7 – NEXT for a channel 43
Table 8 – Informative NEXT values for a channel at key frequencies 44

BS ISO/IEC 11801-1:2017

Table 9 – PS NEXT for a channel 45
Table 10 – Informative PS NEXT values for a channel at key frequencies 46
Table 11 – Informative ACR-N values for a channel at key frequencies 47
Table 12 – Informative PS ACR-N values for a channel at key frequencies 48
Table 13 – ACR-F for a channel 49
Table 14 – Informative ACR-F values for a channel at key frequencies 50
Table 15 – PS ACR-F for a channel 51
Table 16 – Informative PS ACR-F values for a channel at key frequencies 52
Table 17 – DC loop resistance for a channel 52
Table 18 – Propagation delay for a channel 53
Table 19 – Informative propagation delay values for a channel at key frequencies 54
Table 20 – Delay skew for a channel 55
Table 21 – TCL for channel for unscreened systems 56
Table 22 – Informative TCL values for unscreened channels at key frequencies 56
Table 23 – TCL for Class I and II screened channels 56
Table 24 – Informative TCL values for Class I and II screened channels at key frequencies 57
Table 25 – ELTCTL for channel for unscreened systems 57
Table 26 – Informative ELTCTL values for unscreened channels at key frequencies 58
Table 27 – ELTCTL for Class I and II channels 58
Table 28 – Informative ELTCTL values for Class I and II channels at key frequencies 58
Table 29 – Coupling attenuation for a channel for screened systems 59
Table 30 – PS ANEXT for a channel 60
Table 31 – Informative PS ANEXT values for a channel at key frequencies 60
Table 32 – PS $ANEXT_{avg}$ for a channel 61
Table 33 – Informative PS $ANEXT_{avg}$ values for a channel at key frequencies 61
Table 34 – PS AACR-F for a channel 62
Table 35 – Informative PS AACR-F values for a channel at key frequencies 63
Table 36 – PS $AACR\text{-}F_{avg}$ for a channel 63
Table 37 – Informative PS $AACR\text{-}F_{avg}$ values for a channel at key frequencies 64
Table 38 – Alien crosstalk and coupling attenuation for screened channels 64
Table 39 – Return loss for a channel 65
Table 40 – Insertion loss for a channel 65
Table 41 – Informative insertion loss values for a channel at key frequencies 66
Table 42 – DC loop resistance for a channel 66
Table 43 – DC current carrying capacity for a channel 66
Table 44 – Operating voltage for a channel 66
Table 45 – Screening attenuation for a channel 67
Table 46 – Return loss for 2-connection or 3-connection link 69
Table 47 – Informative return loss values for links at key frequencies 70
Table 48 – Insertion loss for 2-connection or 3-connection link 71
Table 49 – Informative insertion loss values for links with maximum implementation at key frequencies 72

Table 50 – NEXT for 2-connection or 3-connection link 72
Table 51 – Informative NEXT values for links with maximum implementation at key frequencies 74
Table 52 – PS NEXT for 2-connection or 3-connection link 75
Table 53 – Informative PS NEXT values for links with maximum implementation at key frequencies 76
Table 54 – Informative ACR-N values for links with maximum implementation at key frequencies 77
Table 55 – Informative PS ACR-N values for links with maximum implementation at key frequencies 78
Table 56 – ACR-F for 2-connection or 3-connection link 79
Table 57 – Informative ACR-F values for links with maximum implementation at key frequencies 80
Table 58 – PS ACR-F for 2-connection or 3-connection link 81
Table 59 – Informative PS ACR-F values for links with maximum implementation at key frequencies 82
Table 60 – DC loop resistance for 2-connection or 3-connection link 82
Table 61 – Informative DC loop resistance for links with maximum implementation 83
Table 62 – Propagation delay for 2-connection or 3-connection link 84
Table 63 – Informative propagation delay values for links with maximum implementation at key frequencies 84
Table 64 – Delay skew for 2-connection or 3-connection link 85
Table 65 – Informative delay skew for links with maximum implementation 86
Table 66 – TCL for Class I and II screened permanent links 87
Table 67 – Informative TCL values for Class I and II screened permanent links at key frequencies 87
Table 68 – ELTCTL for Class I and II permanent links 88
Table 69 – Informative ELTCTL values for Class I and II permanent links at key frequencies 88
Table 70 – Coupling attenuation for a screened permanent link 89
Table 71 – Informative coupling attenuation values for screened permanent links at key frequencies 89
Table 72 – PS ANEXT for 2-connection or 3-connection link 90
Table 73 – Informative PS ANEXT values for links at key frequencies 91
Table 74 – PS $ANEXT_{avg}$ for 2-connection or 3-connection link 91
Table 75 – Informative PS $ANEXT_{avg}$ values for links at key frequencies 92
Table 76 – PS AACR-F for 2-connection or 3-connection link 92
Table 77 – Informative PS AACR-F values for links at key frequencies 93
Table 78 – PS $AACR\text{-}F_{avg}$ for a 2-connection or 3-connection link 93
Table 79 – Informative PS $AACR\text{-}F_{avg}$ values for links at key frequencies 94
Table 80 – Alien crosstalk and coupling attenuation for screened links 94
Table 81 – Insertion loss for link 95
Table 82 – Informative insertion loss values for link at key frequencies 95
Table 83 – DC loop resistance for link 95
Table 84 – Backbone link length equations 97

Table 85 – Basic requirements of balanced cables 99
Table 86 – Mechanical characteristics of balanced cables of Category 5, 6, 6_A, 7 and 7_A 99
Table 87 – Mechanical characteristics of balanced cables of Category BCT-B 102
Table 88 – Minimum transmission performance requirements BCT-B balanced pairs 102
Table 89 – Basic requirements of coaxial cables 103
Table 90 – Mechanical performance requirements for coaxial BCT cables 103
Table 91 – Minimum electrical performance requirements for cables of Category BCT-C 104
Table 92 – Cabled optical fibre attenuation (maximum), dB/km 105
Table 93 – Multimode optical fibre modal bandwidth 105
Table 94 – Environmental performance specifications for balanced cabling connecting hardware 107
Table 95 – Environmental performance specifications for coaxial cabling connecting hardware 108
Table 96 – Environmental performance specifications for optical fibre cabling connecting hardware 109
Table 97 – Mechanical characteristics of connecting hardware for use with balanced cabling 111
Table 98 – Matrix of backward compatible mated free and fixed connector (plug and jack) performance 113
Table 99 – Return loss 113
Table 100 – Informative return loss values for connector at key frequencies 114
Table 101 – Insertion loss 114
Table 102 – Informative insertion loss values for connector at key frequencies 115
Table 103 – Near-end crosstalk (NEXT) 115
Table 104 – Informative NEXT values for connector at key frequencies 116
Table 105 – Power sum near-end crosstalk (PS NEXT) (for information only) 116
Table 106 – Informative PS NEXT values for connector at key frequencies 117
Table 107 – Far-end crosstalk (FEXT) 117
Table 108 – Informative FEXT values for connector at key frequencies 118
Table 109 – Power sum far-end crosstalk (PS FEXT) (for information only) 118
Table 110 – Informative PS FEXT values for connector at key frequencies 119
Table 111 – Input to output resistance 119
Table 112 – Input to output resistance unbalance 119
Table 113 – DC current carrying capacity 119
Table 114 – Propagation delay 120
Table 115 – Delay skew 120
Table 116 – Transverse conversion loss (TCL) 120
Table 117 – Informative TCL values for connector at key frequencies 121
Table 118 – Transverse conversion transfer loss (TCTL) 121
Table 119 – Informative TCTL values for connector at key frequencies 121
Table 120 – Transfer impedance (screened connectors only) 122
Table 121 – Informative transfer impedance values (screened connectors only) at key frequencies 122

Table 122 – Coupling attenuation (screened connectors only) 122
Table 123 – Informative coupling attenuation values (screened connectors only) at key frequencies 122
Table 124 – Insulation resistance 123
Table 125 – Voltage proof 123
Table 126 – Power sum alien near-end crosstalk (PS ANEXT) 123
Table 127 – Informative PS ANEXT values at key frequencies 123
Table 128 – Power sum alien far-end crosstalk (PS AFEXT) 124
Table 129 – Informative PS AFEXT values at key frequencies 124
Table 130 – Coupling attenuation for BCT-B connecting hardware 125
Table 131 – Formulae for return loss limits for BCT-C connecting hardware 125
Table 132 – Return loss limits for BCT-C connecting hardware at key frequencies 126
Table 133 – Formulae for insertion loss limits for BCT-C connecting hardware 126
Table 134 – Insertion loss limits for BCT-C connecting hardware at key frequencies 126
Table 135 – Screening attenuation limits for BCT-C connecting hardware 126
Table 136 – Attenuation of connecting hardware for optical fibre 127
Table 137 – Return loss of optical fibre connecting hardware 127
Table 138 – Electrical characteristics of terminal equipment outlets intended for use with balanced cabling 128
Table 139 – Minimum return loss for balanced cords 132
Table 140 – Informative values of return loss for balanced cords at key frequencies 132
Table 141 – Assumptions for cabling components used in the calculation of NEXT informative values 134
Table 142 – Informative values of NEXT for 2 m balanced cords at key frequencies 134
Table 143 – Informative values of NEXT for 5 m balanced cords at key frequencies 135
Table 144 – Informative values of NEXT for 10 m balanced cords at key frequencies 135
Table A.1 – Test regime for reference conformance and installation conformance – Balanced cabling of Classes A through F_A, BCT-B, I and II 139
Table A.2 – Test regime for reference conformance and installation conformance – Optical fibre cabling 140
Table B.1 – Standards for solderless connections 141
Table B.2 – Standards for free and fixed connectors (modular plugs and jacks) 142
Table B.3 – Standards for M12 style connectors 142
Table B.4 – Free and fixed connectors (modular plugs and jacks) operations matrix 143
Table B.5 – Reference for reliability testing of other connecting hardware 143
Table B.6 – Other connecting hardware operations matrix 144
Table E.1 – Applications using balanced cabling 149
Table E.2 – Industrial applications using balanced cabling 150
Table E.3 – Modular connector pin assignment for applications 151
Table E.4 – Maximum channel attenuation for supported applications using optical fibre cabling 152
Table E.5 – Maximum channel lengths supported by optical fibre applications for multimode optical fibre 153
Table E.6 – Maximum channel length supported by optical fibre applications for single-mode optical fibre 154

BS ISO/IEC 11801-1:2017

Table E.7 – Supported BCT applications using balanced cabling 154
Table E.8 – Supported BCT applications using coaxial cabling 155
Table E.9 – Supported applications and maximum channel lengths with cabled multimode optical fibres 155
Table E.10 – Supported applications and maximum channel lengths with cabled all-silica single-mode optical fibres 155
Table F.1 – Grandfathered OM1, OM2 and OS1 specifications..... 156
Table F.2 – Supported applications and maximum channel lengths with cabled all-silica multimode optical fibres 156
Table F.3 – Supported applications and maximum channel lengths with cabled all-silica singlemode optical fibres 156

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 1: General requirements

FOREWORD

1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.

3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.

4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.

5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.

6) All users should ensure that they have the latest edition of this publication.

7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.

8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 11801-1 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This first edition, together with ISO/IEC 11801-2, cancels and replaces ISO/IEC 11801:2002, Amendment 1:2008 and Amendment 2:2010. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) standard re-structured to contain those elements and requirements, that are common to generic cabling systems (in application fields such as offices and industrial premises), namely requirements for common elements of topology and transmission performance of channels, links and related components;

b) addition of balanced cabling channel and link Classes BCT-B, I and II;

c) addition of coaxial cabling channel and link Class BCT-C;

d) addition of balanced cabling component requirements for Category BCT-B, 8.1, and 8.2;

e) addition of coaxial cabling component requirements for Category BCT-C;

f) addition of cabled fibres of Category OS1a, and OM5;

g) removal of silica optical fibre cabling;

h) optical fibre cable OM1, OM2 and OS1 has been moved to an informative annex.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the ISO/IEC 11801 series, published under the general title *Information technology – Generic cabling for customer premises*, can be found on the IEC website.

INTRODUCTION

This document contains general requirements in support of the other premises-specific referenced cabling design documents developed by ISO/IEC JTC 1/SC 25 including ISO/IEC 11801-2, ISO/IEC 11801-3, ISO/IEC 11801-4, ISO/IEC 11801-5, ISO/IEC 11801-6 and related Technical Reports (including the ISO/IEC TR 11801-99xx series, ISO/IEC TR 24704, ISO/IEC TR 24750 and ISO/IEC TR 29125).

This document specifies a multi-vendor cabling system which may be implemented with material from single or multiple sources, and is related to:

a) International Standards for cabling components developed by technical committees of the IEC, for example copper cables and connectors as well as optical fibre cables and connectors (see Clause 2 and bibliography);

b) standards for the testing of installed cabling (see Clause 2 and bibliography);

c) applications developed by technical committees of the IEC, by subcommittees of ISO/IEC JTC 1, by study groups of ITU-T, for example for LANs and ISDN, and by IEEE 802;

d) planning and installation guides and other standards which take into account the needs of specific applications for the configuration and the use of cabling systems on customer premises (e.g. ISO/IEC 14709 series, ISO/IEC 14763 series, ISO/IEC 30129, and ISO/IEC 18598).

Physical layer requirements for the applications listed in Annex E have been analysed to determine their compatibility with cabling classes specified in this document. These application requirements, together with statistics concerning premises-specific topologies and cabling models of the supported standards, have been used to develop the requirements for balanced, coaxial and optical fibre cabling.

As a result, generic cabling defined within this document:

1) specifies balanced cabling channel and link Classes A, B, C, D, E, E_A, F, F_A, I and II meeting both the requirements of standardized applications and to support the development and implementation of future applications;

2) specifies balanced cabling channel and link Class BCT-B to support the delivery of BCT applications;

3) specifies coaxial cabling channel and link Class BCT-C to support the delivery of BCT applications;

4) specifies optical fibre cabling meeting the requirements of standardized applications and exploiting component capabilities to ease the implementation of applications developed in the future;

5) invokes component requirements and specifies cabling implementations that ensure performance of links and of channels that meet or exceed the requirements for cabling classes.

Figure 1 shows the schematic and contextual relationships between the standards relating to information technology cabling produced by ISO/IEC JTC 1/SC 25, namely the ISO/IEC 11801 series of standards for generic cabling design, standards for the installation, operation and administration of generic cabling and for testing of installed generic cabling.

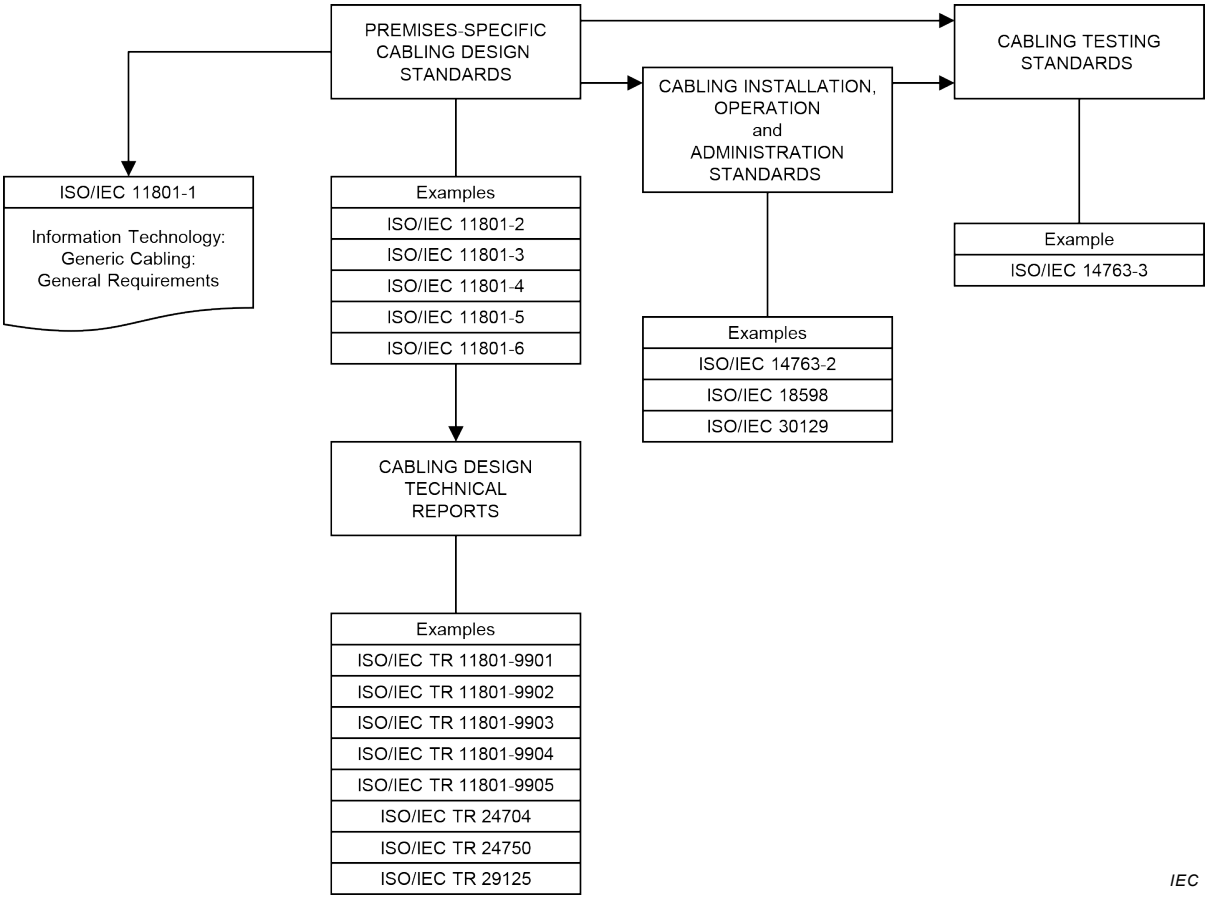


Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25

This document refers to International Standards for components and test methods wherever appropriate International Standards are available.

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 1: General requirements

1 Scope

This part of ISO/IEC 11801 specifies requirements that are common to the other parts of the ISO/IEC 11801 series. Cabling specified by this document supports a wide range of services including voice, data, and video that may also incorporate the supply of power.

This document specifies:

a) the fundamental structure and configuration of generic cabling requirements within the types of premises defined by the other parts of the ISO/IEC 11801 series,

b) channel transmission and environmental performance requirements,

c) link performance requirements,

d) backbone cabling reference implementations in support of the parts of the ISO/IEC 11801 series,

e) component performance requirements, referring to available International Standards for components and test methods where appropriate,

f) test procedures to verify conformance to the cabling transmission performance requirements of the ISO/IEC 11801 series.

NOTE This document does not contain specific conformance requirements. The cabling design documents supported by ISO/IEC 11801-1 incorporate the requirements of this document as part of their individual conformance requirements.

In addition, this document provides information regarding the applications supported by the cabling channels.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60352-2, *Solderless connections – Part 2: Crimped connections – General requirements, test methods and practical guidance*

IEC 60352-3, *Solderless connections – Part 3: Solderless accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-4, *Solderless connections – Part 4: Solderless non-accessible insulation displacement connections – General requirements, test methods and practical guidance*

IEC 60352-5, *Solderless connections – Part 5: Press-in connections – General requirements, test methods and practical guidance*

IEC 60352-6, *Solderless connections – Part 6: Insulation piercing connections – General requirements, test methods and practical guidance*

IEC 60352-7, *Solderless connections – Part 7: Spring clamp connections – General requirements, test methods and practical guidance*

IEC 60352-8, *Solderless connections – Part 8: Compression mount connections – General requirements, test methods and practical guidance*